

TENT COOPERATION TREA

2711
PCTNOTIFICATION OF THE RECORDING
OF A CHANGE(PCT Rule 92bis.1 and
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

KOLSTER OY AB
Iso Roobertinkatu 23
P.O. Box 148
FIN-00121 Helsinki
FINLANDERECEIVED
JAN - 4 2001
TECH CENTER 2730

Date of mailing (day/month/year) 01 November 1999 (01.11.99)	IMPORTANT NOTIFICATION
Applicant's or agent's file reference 2980022PC/nu	
International application No. PCT/FI99/00057	International filing date (day/month/year) 28 January 1999 (28.01.99)

1. The following indications appeared on record concerning:

☒ the applicant

 ☐ the inventor

 ☐ the agent

 ☐ the common representative

Name and Address NOKIA TELECOMMUNICATIONS OY Keilalahdentie 4 FIN-02150 Espoo Finland	State of Nationality FI	State of Residence FI
	Telephone No.	
	Facsimile No.	
	Teleprinter No.	

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐ the person

 ☒ the name

 ☐ the address

 ☐ the nationality

 ☐ the residence

Name and Address NOKIA NETWORKS OY Keilalahdentie 4 FIN-02150 Espoo Finland	State of Nationality FI	State of Residence FI
	Telephone No.	
	Facsimile No.	
	Teleprinter No.	

3. Further observations, if necessary:

4. A copy of this notification has been sent to:

<input checked="" type="checkbox"/> the receiving Office	<input checked="" type="checkbox"/> the designated Offices concerned
<input type="checkbox"/> the International Searching Authority	<input type="checkbox"/> the elected Offices concerned
<input type="checkbox"/> the International Preliminary Examining Authority	<input type="checkbox"/> other:

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer Dominique DELMAS Telephone No.: (41-22) 338.83.38
--	---

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00057

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/38, H04Q 7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9740638 A1 (TELIA AB), 30 October 1997 (30.10.97), page 1, line 12 - line 30, abstract --	
A	WO 9726764 A1 (NOKIA TELECOMMUNICATIONS OY), 24 July 1997 (24.07.97), abstract, see the claims --	
P,A	GB 2322521 A (VODAFONE LIMITED), 26 August 1998 (26.08.98), abstract, see the claims -- -----	

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 29 June 1999	Date of mailing of the international search report 03 -07- 1999
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Peter Hedman/MN Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/FI 99/00057


Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9740638 A1	30/10/97	AU 1046297 A	19/06/97
		EP 0883868 A	16/12/98
		EP 0894410 A	03/02/99
		NO 984869 A	22/10/98
		SE 9601559 A	25/10/97
WO 9726764 A1	24/07/97	AU 1445997 A	11/08/97
		FI 2705 U	20/01/97
		FI 102234 B	00/00/00
		FI 960211 A,V	17/07/97
GB 2322521 A	26/08/98	GB 9703795 D	00/00/00



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38, 7/22		A1	(11) International Publication Number: WO 99/39534
			(43) International Publication Date: 5 August 1999 (05.08.99)
(21) International Application Number: PCT/FI99/00057 (22) International Filing Date: 28 January 1999 (28.01.99) (30) Priority Data: 980185 28 January 1998 (28.01.98) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventor; and (75) Inventor/Applicant (for US only): VIRTANEN, Kari [FI/FI]; Tohtorinkatu 34 D 17, FIN-33720 Tampere (FI). (74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: RADIO NETWORK ACCESS MECHANISM

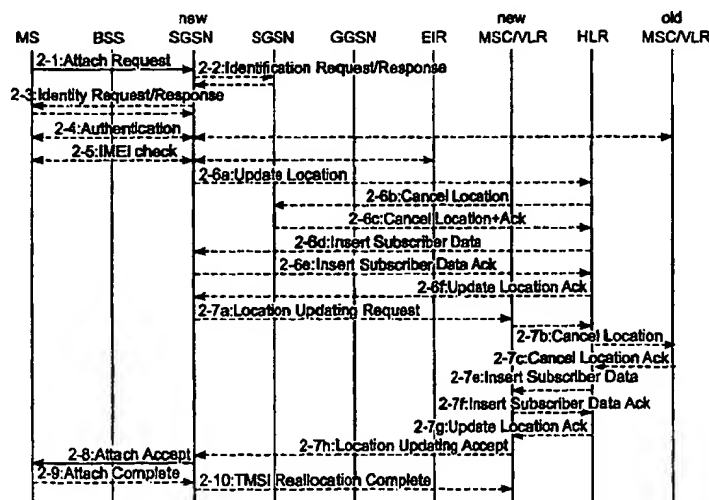

(57) Abstract

A method of registration in a telecommunications system by a mobile station, which system comprises a home location register (HLR) for maintaining subscriber data and supports a first network, such as GSM, and a second network, such as GPRS. The home location register (HLR) maintains the mobile subscriber data and a message (2-6a, 4-3) is sent to the home location register (HLR) for requesting the mobile subscriber data. According to the invention, the home location register (HLR) maintains an access parameter (PARAM) which indicates whether the mobile subscriber is entitled to use the first network, the second network or both networks. In response to said message for requesting the subscriber data, the home location register sends the mobile subscriber data and also said access parameter. The network element that requested the mobile subscriber data uses said access parameter for restricting the access of the mobile subscriber only to a circuit-switched network and/or to a packet-switched network.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

RADIO NETWORK ACCESS MECHANISM

BACKGROUND OF THE INVENTION

The invention relates to reduction of signalling load when a multi-mode (e.g. GSM/GPRS) mobile station registers in a packet radio network, such as GPRS. The invention is described in connection with a dual-mode telecommunications system which supports two different networks. To clarify the description, it is assumed that the first network is a circuit-switched network (such as GSM) and the second network is a packet-switched network (such as GPRS). Instead of the GSM network, or in addition to it, derivatives of the GSM, such as DCS, may also be used.

A General Packet Radio Service (GPRS) is a new service in the GSM. It is one of the items that is being standardized in GSM phase 2+ in the ETSI (European Telecommunication Standard Institute). The GPRS operational environment consists of one or more sub-network service areas that are interconnected using a GPRS backbone network. A sub-network comprises a number of packet data service nodes, which are here called GPRS support nodes (or agents) and each one of which is connected to the GSM mobile network so that it can provide packet data service for mobile data terminals via several base stations, i.e. cells. An intermediate mobile network provides circuit-switched or packet-switched data transmission between a support node and the mobile data terminals. Different sub-networks, in turn, are connected to an external data network, for example to a Public Switched Packet Data Network PSPDN. The GPRS service can thus be used for effecting packet data transmission between mobile data terminals and external data networks, when the GSM network functions as an access network. One feature of the GPRS service network is that it operates almost independently of the GSM network. One of the requirements set for the GPRS service is that it must operate together with different types of external PSPDN networks, such as the Internet and X.25 networks. In other words, the GPRS service and the GSM network should be able to serve all users, irrespective of the type of data networks that they wish to be connected to via the GSM network. This means that the GSM network and GPRS service must support and process different network addressing methods and data packet formats. The data packet processing also comprises routing of the packets in a packet radio network. In

addition, the users should be able to roam from their home GPRS network to a visited GPRS network.

Figure 1 illustrates a typical arrangement in a GPRS network. It should be understood that the architecture of the GPRS networks is not as mature as that of the GSM networks. All GPRS terms should therefore be understood as being descriptive terms rather than limiting ones. A typical mobile station forming a mobile data terminal consists of a mobile station MS of a mobile network and of a portable computer PC connected to the data interface of the MS. The mobile station may be, for example, a Nokia 2110, manufactured by Nokia Mobile Phones Ltd., Finland. By means of a PCMCIA type Nokia Cellular Datacard, manufactured by Nokia Mobile Phones Ltd., the mobile station can be connected to any portable personal computer PC whatsoever that has a PCMCIA card slot. The PCMCIA card thus provides the PC with an access point that supports the protocol of the telecommunications application used in the PC, such as the CCITT X.25 or Internet Protocol IP. Alternatively, the mobile station can directly provide an access point that supports the protocol used by the PC application. Further, a mobile station 3 and a PC 4 can be integrated to form a single unit, within which the application is provided with an access point that supports the protocol used by it. An example for such a mobile station with an integrated computer is a Nokia Communicator 9000, manufactured by Nokia Mobile Phones Ltd., Finland.

Network elements BSC and MSC are previously known from a typical GSM network. The arrangement of Figure 1 comprises a separate Serving GPRS Support Node SGSN. The support node controls certain operations of the packet radio service on the network side. The operations include the logging on and off the system by the mobile stations MS, updating of the routing areas of the mobile stations MS, and routing of the data packets to correct destinations. In the present application, the term 'data' should be understood in the wide sense to mean any information whatsoever transmitted in a digital telecommunications system. The information can comprise speech encoded into digital form, data communication between computers, telefax data, short segments of program code, etc. The SGSN node can be located at a base station BTS, at a base station controller BSC or at a mobile switching centre MSC, or it can be separate from all these elements. The interface between the SGSN node and the base station controller BSC is called a GB

interface. An area managed by one base station controller BSC is called a Base Station Subsystem BSS.

The intermediate mobile network provides packet-switched data transmission between a support node and mobile data terminal equipment.

5 Different sub-networks, in turn, are connected to an external data network, for example to a PSPDN, via specific Gateway GPRS Support Nodes GGSN. Packet data transmission between mobile data terminals and external data networks is thus effected by means of the GPRS service, while the GSM network functions as an access network. Alternatively, the gateway node
10 GGSN can be replaced with a router. In the following, the term 'gateway node GGSN' is also to be understood as referring to a structure in which the gateway has been replaced with a router.

In Figure 1 the GPRS network connected to the GSM network comprises a number of serving GPRS support nodes and one gateway GPRS
15 support node GGSN. The different support nodes SGSN and GGSN are interconnected via an intra-operator backbone network. It is to be understood that a GPRS network may comprise any number of support nodes SGSN and gateway nodes GGSN.

Each support node SGSN manages a packet data service in the
20 area of one or more nodes in a cellular packet radio network. To achieve this, each support node SGSN is connected to a certain local part of the GSM system, typically to a mobile services switching centre, but in some situations it may be preferable to connect it directly to a base station subsystem BSS, i.e. to a base station controller BSC or a base station BTS. A mobile station MS in
25 a cell communicates with a base station BTS over a radio interface and further through a mobile network with the support node SGSN to the service area of which the cell belongs. In principle, the mobile network between the support node SGSN and the mobile station MS only transmits packets between these two. For this purpose, the mobile network can offer either a circuit-switched
30 connection or packet-switched data packet transmission between a mobile station MS and a serving support node SGSN. An example for a circuit-switched connection between a mobile station MS and an agent is presented in WO 95/08900. An example for packet-switched data transmission between a mobile station MS and an agent is presented WO 95/20283. It should be
35 noted, however, that a mobile network provides only a physical connection

between a mobile station MS and a support node SGSN, and that its exact operation and structure are not relevant to the present invention.

5 An intra-operator backbone network 11 interconnecting the operator's SGSN and GGSN can be implemented, for example, using a local area network. It should be noted that it is also possible to implement the operator's GPRS network without an intra-operator backbone network, for example, by implementing all the features in a single computer, but this does not cause any changes in the call set-up principles according to the present invention.

10 A gateway GPRS node GGSN connects the operator's GPRS network to the other operators' GPRS networks and to data networks, such as an inter-operator backbone network 12 or an IP network. An Interworking Function IWF can be arranged between the gateway node GGSN and the other networks, but usually the GGSN is simultaneously the IWF. The inter-
15 operator backbone network 12 is one through which the gateway nodes GGSN of different operators can communicate with one another. The communication is needed to support the GPRS roaming between the different GPRS networks.

20 The gateway node GGSN is also used for storing the location information of the GPRS mobile stations. The GGSN also routes mobile-terminated (MT) data packets. The GGSN also contains a database that associates the mobile station's network address, for example in an IP network or an X.25 network (or simultaneously in more than one network), and the mobile station identifier in a GPRS network. When the mobile station roams
25 from one cell to another within the area of one support node SGSN, location updating is needed only in the support node SGSN, and the gateway node GGSN need not be informed of the change of location. When the mobile station roams from a cell of one support node SGSN to a cell of another SGSN within the area of the same or a different operator, location updating is also
30 performed in the (home) gateway node GGSN so as to store the identifier of the new, visited support node and the identifier of the mobile station.

A home location register HLR is also used to authenticate subscribers at the beginning of a GPRS session. It contains a definition between a subscriber's PDP (Packet Data Protocol) address (addresses) and
35 the subscriber's IMSI (International Mobile Subscriber Identity). In a GSM network a subscriber is identified on the basis of the IMSI. In Figure 1 the HLR

is connected through an SS7 (Signalling System 7), for example to a mobile switching centre MSC and an intra-operator backbone network. Between the SS7 signalling system and the intra-operator backbone network there can be a direct connection or an SS7 gateway. In principle, the HLR can exchange packet-switched messages with any GPRS node whatsoever. The HLR's method of communication and its connection to the GPRS network are not, however, essential to the invention.

In the above arrangement, packet-switched data (in short: packet data) can be transmitted to a mobile station over an air interface, when the mobile station, controlled by the network, has first been directed to a correct kind of channel, i.e. to a packet data transmission channel. A mobile station that supports packet data transmission can either be suited only to the transmission and reception of packet data ('GPRS only') or also to the transmission of conventional circuit-switched speech and other services ('multi-function terminal').

A 'GPRS only' mobile station can be in one of three different modes in the sense of the present application: a ready, a standby or an idle mode. A mobile station in the ready mode is connected to a data transmission channel and is ready to transmit and/or receive data packets. A mobile station in the standby mode listens to a packet data paging channel, and after receiving its paging identifier the mobile station switches to the ready mode. A mobile station in the idle mode does not support transmission nor reception of packet data.

A multi-function terminal operates in the ready and standby modes in the same way as the 'GPRS only' terminal, but in the idle mode it supports conventional circuit-switched services.

When packet data is sent to a mobile station, the data will be routed to the correct GSM network by routing it via the gateway node GGSN to the support node SGSN in which the location of the mobile station is known. If the mobile station is in the standby mode, its location is known with the accuracy of a Routing Area RA. Correspondingly, if the mobile station is in the ready mode, its location is known with the accuracy of a cell.

Figure 2 illustrates registration of a mobile station in the system. Figure 2 is taken from the ETSI specification GSM 03.60 (version 5.2.0). The previous support node SGSN and centre MSC/VLR of the mobile station are called "the old ones" and their present counterparts are called "the new ones".

In step 2-1 the mobile station sends an ATTACH REQUEST message. Steps 2-2 to 2-5 are neither necessary nor essential to the invention, and thus they will not be described here. In step 2-6a the new SGSN sends an UPDATE LOCATION message to the home location register HLR, which in step 2-6b
5 cancels the location (CANCEL LOCATION) from the old SGSN. In step 2-6c the old SGSN acknowledges (=ACK). In step 2-6d the new SGSN receives subscriber data from the home location register in a message INSERT SUBSCRIBER DATA and sends an acknowledgement in step 2-6e. In step 2-6f the new SGSN receives an acknowledgement to the update location
10 message which was sent in step 2-6a.

In step 2-7a the new SGSN sends a LOCATION UPDATING REQUEST to the new centre MSC/VLR. Steps 2-7b to 2-7g correspond to steps 2-6a to 2-6f. In step 2-7h the new SGSN receives an acknowledgement to the location updating request sent in step 2-7a from the new centre. In step
15 2-8 the new SGSN informs the mobile station of the fact that the attach request sent in step 2-1 has been accepted. The following steps are not essential to the invention, and thus they will not be explained more closely.

A problem related to the arrangement described above is that the GPRS side of the system has no subscriber-specific information on whether a
20 certain subscriber has access to the service on the GSM side (MSC/VLR). When a mobile station PC/MS registers in the system, a combined GPRS/non-GPRS IMSI attach operation and possibly a location area/routing area (LA/RA) update to the visitor location register MSC/VLR are carried out. This causes unnecessary signalling to the MSC/VLR via the Gs interface and
25 further to the home location register HLR via the MAP-D interface if the subscriber is only a GPRS subscriber.

A parallel problem arises when the GSM side of the system has no subscriber-specific information on whether a certain subscriber has access to the service on the GPRS side (SGSN). This causes unnecessary signalling if
30 the VLR has lost the subscriber data. In the case of a mobile-terminating call, a page has to be always sent to each SGSN node since the MSC/VLR does not know whether the subscriber has a GPRS service or not.

BRIEF DESCRIPTION OF THE INVENTION

It is an object of the invention to provide a method and an
35 apparatus implementing the method, eliminating the above-mentioned

problems related to unnecessary signalling. The objects of the invention are achieved by a method and an apparatus which are characterized by what is disclosed in the independent claims. Preferred embodiments of the invention are disclosed in the dependent claims.

5 First of all, the invention is based on finding the problem. Since the excessive signalling caused by conventional solutions does not necessarily cause actual error situations and GSM/GPRS networks are not in use yet, it is not that easy to detect the problem. In addition to finding the problem, the invention is based on finding a solution which causes as few compatibility
10 problems and changes to the function of other network elements as possible. It is not desirable to make great changes to the definitions of network elements because of a relatively small problem.

The invention comprises maintaining a subscriber-specific access parameter, which indicates what rights the subscriber in question has in both
15 networks. The access parameter is transmitted to a relevant network element on registration in the system. The advantages of the invention, such as decrease of the signalling load, are the greatest if the first network and the second network have clearly different architectures. This is the case for example when the first network is a circuit-switched network (such as GSM,
20 DSC, etc.) and the second network is a packet-switched network (such as GPRS).

An advantage of the method and arrangement of the invention is that they solve a non-obvious problem in a simple manner. In other words, the invention eliminates unnecessary signalling load when a mobile station
25 registers in the system. The invention also surprisingly provides a solution to several other separate problems, as will be described below.

According to a first embodiment of the invention, the subscriber-specific access parameter is maintained in the home location register. An advantage of this embodiment is that no changes are needed in the mobile
30 stations and their SIM cards.

According to a second embodiment of the invention, the subscriber-specific access parameter is maintained in the mobile station, in particular in its SIM card (Subscriber Identity Module). An advantage of this embodiment is that the signalling load decreases considerably. On the other hand, changes
35 have to be made to the mobile stations, at least to their SIM cards.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in greater detail by means of preferred embodiments with reference to the accompanying drawings, in which

Figure 1 illustrates an architecture of a GSM/GPRS system;

5 Figure 2 illustrates registration of a mobile station in the system according to the prior art;

Figure 3 illustrates registration of a mobile station in the system according to a first embodiment of the invention;

10 Figure 4 illustrates how the invention solves a separate problem which arises when the data of the visitor location register disappear.

DETAILED DESCRIPTION OF THE INVENTION

Figure 3 illustrates registration of a mobile station in the system according to the solution of the invention. In Figure 3 the same numbers have the same significance as in Figure 2, except when there are some changes in
15 the messages, in which case the first number of a message is 3. An access parameter PARAM of the invention indicates whether the subscriber has access to the GSM network, the GPRS network or to both networks. According to a first embodiment, the access parameter is maintained in the subscriber data of the home location register HLR. In the figure message 3-6d
20 corresponds to message 2-6d described in connection with figure 2, except that an access parameter PARAM according to the invention is associated with message 3-6d. In this case it is assumed that the subscriber has access only to the GPRS network. Since the new SGSN knows that the subscriber has no access to the GSM network, steps 2-7a to 2-7h are not needed at all
25 when the solution of the invention is used. Instead of message 2-8, message 3-8 ATTACH RESPONSE is used, which conveys information to the mobile subscriber on the fact that he has only GPRS rights. Message 2-10 is not needed. It is not necessary to transmit data on a subscriber who has no GSM rights to the visitor location register of the new centre.

30 According to a second embodiment of the invention, the subscriber-specific access parameter is maintained in the mobile station, particularly in its SIM card. In that case, a mobile station whose SIM card has information only on the GPRS rights decides independently not to even try to register in the GSM network. Decrease of the signalling load is complete since there would
35 be no signals in a signalling chart corresponding to Figure 3.

Figure 4 illustrates how the invention solves another separate problem. Figure 4 illustrates set-up of a mobile terminating call when the data of the visitor location register VLR have disappeared, for example during equipment maintenance or program updating. In step 4-1 the HLR requests a roaming number from the VLR. In step 4-2 the VLR requests authentication data from the HLR. In step 4-3 the VLR requests the HLR to send back the lost data. In optional step 4-4 the subscriber is set under trace. In step 4-5 the HLR sends the subscriber data to the VLR in the message INSERT SUBSCRIBER DATA. (The access parameter PARAM illustrated in step 4-5 does not exist in the functionality according to the prior art.) In step 4-7 the mobile station MS receives a mobile-terminating call or a short message via the centre MSC. However, the visitor location register does not have subscriber location data, and thus in step 4-8 it requests the centre to search for the mobile station (SEARCH FOR MS). According to the prior art, a page has to be sent to the mobile station in step 4-9 via each of the base station systems BSS₁ to BSS_n under the centre MSC and also via each of the support nodes SGSN₁ to SGSN_n.

According to the invention, the above-described subscriber-specific access parameter PARAM, which indicates whether the subscriber has access to the GSM network, the GPRS network or to both networks, is associated with message 4-5. In step 4-9 paging of a mobile station can be substantially reduced if paging is limited to the network (GSM and/or GPRS) to which the subscriber in question has access. If the subscriber has no access to the GPRS network, paging via the SGSN nodes is unnecessary.

The invention also solves other problems. According to the prior art, an operator cannot explicitly restrict the access of a subscriber to only one network if the subscriber has a short message service SMS in use because the same subscriber data are valid both on the GSM and the GPRS sides of the network. Since the subscriber can register both in the GSM and the GPRS networks, he may reserve resources from both networks (e.g. from temporary registers), even though the services of only one network were available to the subscriber in addition to the short message service (e.g. only GSM + SMS or GPRS + SMS).

Since according to the invention the parameter indicating to which network the subscriber has access (GSM, GPRS or both) can be set explicitly for the subscriber, the operator may optimize the use of the system. This

particularly concerns subscribers to the short message service. According to the prior art, the SMS subscription in the home location register enables access both to the GSM and the GPRS networks. According to the invention, the operator may optimize the use of the system by setting the subscribers who have access only to the GPRS network and short message service to the state "only GPRS network allowed".

The invention also reduces the use of network resources by preventing a subscriber from registering in a wrong network (GSM or GPRS). If the subscriber is for example a GPRS subscriber without the short message service, he may try to register in the GSM network, which loads the network unnecessarily.

It is obvious to a person skilled in the art that as the technology advances, the inventive concept can be implemented in several different ways. Thus the invention and its embodiments are not limited to the examples describe above, but may vary within the scope of the claims.

CLAIMS

1. A method of registration in a telecommunications system by a mobile station, which system comprises a home location register (HLR) for maintaining subscriber data and supports a first network, such as GSM, and a
5 second network, such as GPRS;

the method comprising the steps of: maintaining the mobile subscriber data in the home location register (HLR), and sending, from another network element, a message (2-6a, 4-3) to the home location register (HLR) for requesting the mobile subscriber data;

10 **characterized** in that

the home location register (HLR) maintains an access parameter (PARAM) which indicates whether the mobile subscriber is entitled to use the first network, the second network or both networks;

15 in response to said message for requesting the subscriber data, the home location register sends the mobile subscriber data and also said access parameter;

the network element that requested the mobile subscriber data uses said access parameter for restricting the access of the mobile subscriber only to the first network or to the second network.

20 2. A method of registration in a telecommunications system by a mobile station, which system comprises a home location register (HLR) for maintaining subscriber data and supports a first network, such as GSM, and a second network, such as GPRS;

25 the method comprising storing mobile subscriber data in the memory of a mobile station, preferably in its SIM card;

characterized in that

an access parameter (PARAM) indicating whether the mobile subscriber is entitled to use the first network, the second network or both networks is also stored in the memory of the mobile station;

30 the mobile station uses said access parameter to restrict the access of the mobile subscriber only to the first and/or the second network.

3. A method according to claim 1 or 2, **characterized** in that the mobile subscriber's access can be restricted only to one network even though a short message service had been defined for the mobile subscriber.

4. A method according to claim 1 or 3, **characterized** in that the network element that requested the mobile subscriber data uses said access parameter to prevent location updating (2-7) in a network which the mobile subscriber is not entitled to use.

5 5. A method according to claim 2 or 3, **characterized** in that the mobile station independently decides not to send an attach request (2-1) in a network which the mobile subscriber is not entitled to use.

6. A method according to claim 1, 3 or 4, **characterized** in that the telecommunications system comprises a visitor location register (VLR)
10 known per se; and

when a mobile station which is in the area of the visitor location register receives a call or a short message and the visitor location does not have data of the mobile subscriber in question, said access parameter (PARAM) is used for restricting paging (4-9) of the mobile station only to a
15 network which the mobile subscriber is entitled to use.

7. A method according to any one of the preceding claims, **characterized** in that the first network is a circuit-switched network, such as GSM/DCS, and the second network is a packet-switched network, such as GPRS.

20 8. A data structure which comprises mobile subscriber data in a telecommunications system which supports a first and a second network;


characterized in that the data structure also comprises an access parameter (PARAM) which indicates whether the mobile subscriber is entitled to use the first network, the second network or both networks.

25 9. A data structure according to claim 8, **characterized** in that it is located in the home location register (HLR) of the telecommunications system.

10. A data structure according to claim 8, **characterized** in that it is located in the memory of the mobile station, preferably in its SIM card.

30 11. A data structure according to any one of claims 8 to 10, **characterized** in that the first network is a circuit-switched network, such as GSM/DCS, and the second network is a packet-switched network, such as GPRS.

Fig. 1

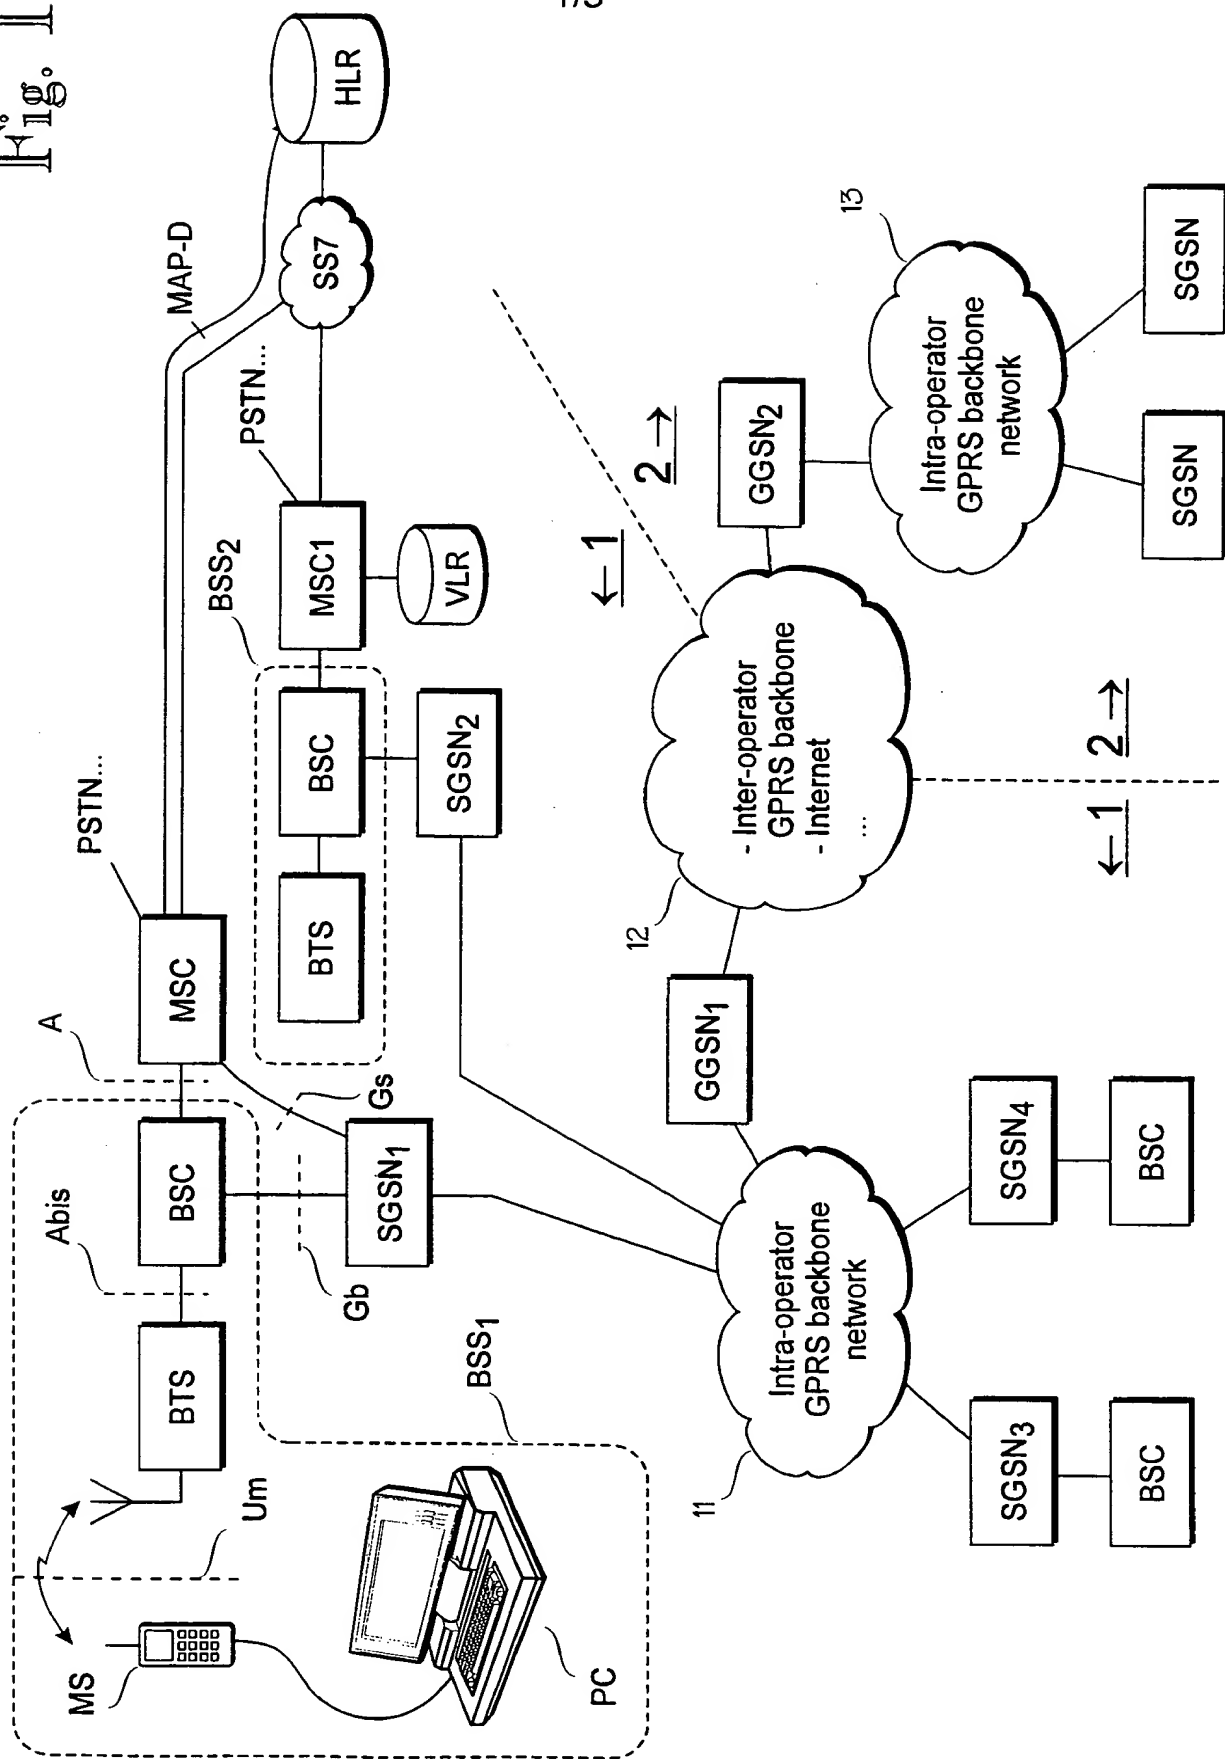

2/3

Fig. 2



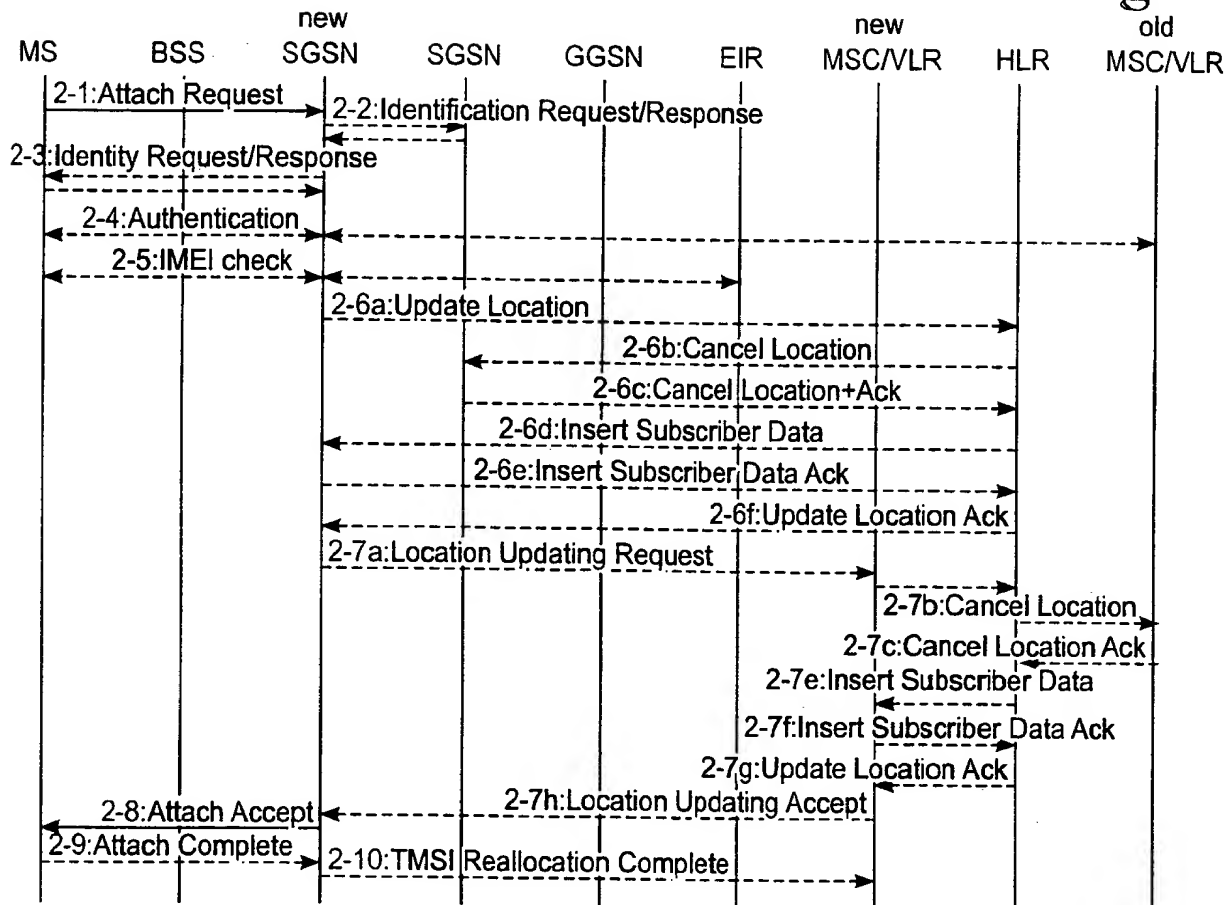


Fig. 3

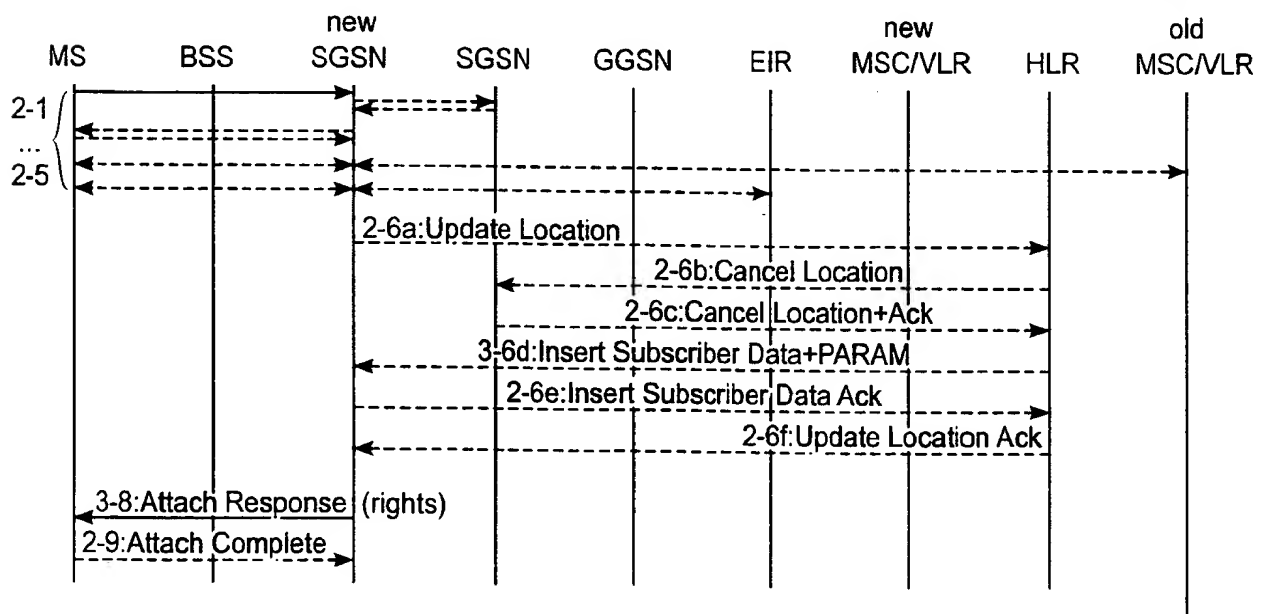

3/3

Fig. 4

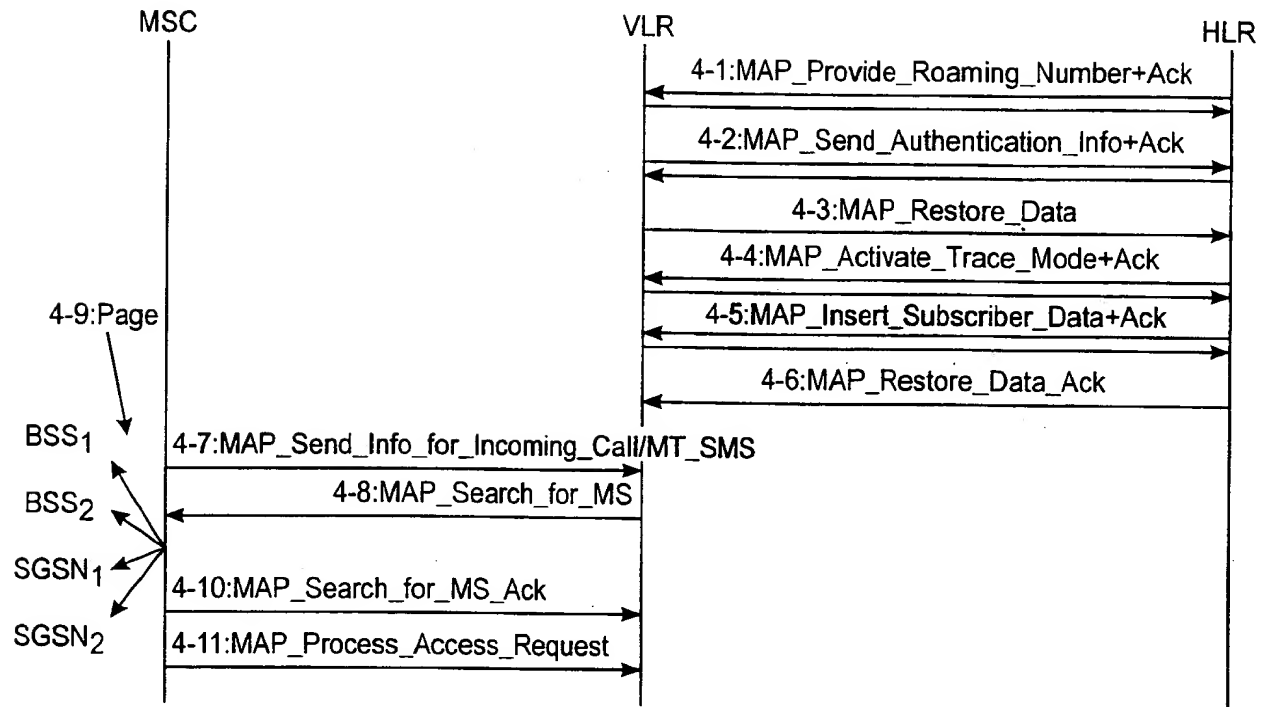

RECORD COPY PCT

REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

For receiving Office only

International Application No.

PCT/FI 99 / 0 0 0 5 7

International Filing Date

28 JAN 1999 (28.01.99)

The Finnish Patent Office
PCT International Application
Name of receiving Office and "PCT International Application"

Applicant's or agent's file reference
(if desired) (12 characters maximum) 2980022PC/nu

Box No. I TITLE OF INVENTION

Radio network access mechanism

Box No. II APPLICANT

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

NOKIA TELECOMMUNICATIONS OY
Keilalahdentie 4
FIN-02150 Espoo
Finland

☐ This person is also inventor

Telephone No.

Facsimile No.

Teleprinter No.

State (that is, country) of nationality:

FI

State (that is, country) of residence:

FI

This person is applicant
for the purposes of:

☐

all designated
States

☒

all designated States except
the United States of America

☐

the United States
of America only

☐

the States indicated in
the Supplemental Box

Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

VIRTANEN Kari
Tohtorinkatu 34 D 17
FIN-33720 Tampere
Finland

This person is:

☐

applicant only

☒

applicant and inventor

☐

inventor only (If this check-box is
marked, do not fill in below.)

State (that is, country) of nationality:

FI

State (that is, country) of residence:

FI

This person is applicant
for the purposes of:

☐

all designated
States

☐

all designated States except
the United States of America

☒

the United States
of America only

☐

the States indicated in
the Supplemental Box

☐ Further applicants and/or (further) inventors are indicated on a continuation sheet.

Box No. IV AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE

The person identified below is hereby/has been appointed to act on behalf
of the applicant(s) before the competent International Authorities as:

☒

agent

☐

common representative

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

KOLSTER OY AB
Iso Roobertinkatu 23
P.O. Box 148
FIN-00121 Helsinki
Finland

Telephone No.

358-9-618821

Facsimile No.

358-9-602244

Teleprinter No.

☐ Address for correspondence: Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.

Box No. V DESIGNATION OF STATES

The following designations are hereby made under Rule 4.9(a) (mark the applicable check-boxes; at least one must be marked):

Regional Patent

- ☒ AP ARIPO Patent: GH Ghana, GM Gambia, KE Kenya, LS Lesotho, MW Malawi, SD Sudan, SZ Swaziland, UG Uganda, ZW Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT
- ☒ EA Eurasian Patent: AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakhstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT
- ☒ EP European Patent: AT Austria, BE Belgium, CH and LI Switzerland and Liechtenstein, CY Cyprus, DE Germany, DK Denmark, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden, and any other State which is a Contracting State of the European Patent Convention and of the PCT
- ☒ OA OAPI Patent: BF Burkina Faso, BJ Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, GA Gabon, GN Guinea, GW Guinea-Bissau, ML Mali, MR Mauritania, NE Niger, SN Senegal, TD Chad, TG Togo, and any other State which is a member State of OAPI and a Contracting State of the PCT (if other kind of protection or treatment desired, specify on dotted line)

National patent (if other kind of protection or treatment desired, specify on dotted line):

- | | |
|--|--|
| <input checked="" type="checkbox"/> AL Albania | <input checked="" type="checkbox"/> LS Lesotho |
| <input checked="" type="checkbox"/> AM Armenia | <input checked="" type="checkbox"/> LT Lithuania |
| <input checked="" type="checkbox"/> AT Austria and utility model | <input checked="" type="checkbox"/> LU Luxembourg |
| <input checked="" type="checkbox"/> AU Australia | <input checked="" type="checkbox"/> LV Latvia |
| <input checked="" type="checkbox"/> AZ Azerbaijan | <input checked="" type="checkbox"/> MD Republic of Moldova |
| <input checked="" type="checkbox"/> BA Bosnia and Herzegovina | <input checked="" type="checkbox"/> MG Madagascar |
| <input checked="" type="checkbox"/> BB Barbados | <input checked="" type="checkbox"/> MK The former Yugoslav Republic of Macedonia |
| <input checked="" type="checkbox"/> BG Bulgaria | <input checked="" type="checkbox"/> MN Mongolia |
| <input checked="" type="checkbox"/> BR Brazil | <input checked="" type="checkbox"/> MW Malawi |
| <input checked="" type="checkbox"/> BY Belarus | <input checked="" type="checkbox"/> MX Mexico |
| <input checked="" type="checkbox"/> CA Canada | <input checked="" type="checkbox"/> NO Norway |
| <input checked="" type="checkbox"/> CH and LI Switzerland and Liechtenstein | <input checked="" type="checkbox"/> NZ New Zealand |
| <input checked="" type="checkbox"/> CN China | <input checked="" type="checkbox"/> PL Poland |
| <input checked="" type="checkbox"/> CU Cuba | <input checked="" type="checkbox"/> PT Portugal |
| <input checked="" type="checkbox"/> CZ Czech Republic and utility model | <input checked="" type="checkbox"/> RO Romania |
| <input checked="" type="checkbox"/> DE Germany and utility model | <input checked="" type="checkbox"/> RU Russian Federation |
| <input checked="" type="checkbox"/> DK Denmark and utility model | <input checked="" type="checkbox"/> SD Sudan |
| <input checked="" type="checkbox"/> EE Estonia and utility model | <input checked="" type="checkbox"/> SE Sweden |
| <input checked="" type="checkbox"/> ES Spain | <input checked="" type="checkbox"/> SG Singapore |
| <input checked="" type="checkbox"/> FI Finland and utility model | <input checked="" type="checkbox"/> SI Slovenia |
| <input checked="" type="checkbox"/> GB United Kingdom | <input checked="" type="checkbox"/> SK Slovakia and utility model |
| <input checked="" type="checkbox"/> GD Grenada | <input checked="" type="checkbox"/> SL Sierra Leone |
| <input checked="" type="checkbox"/> GE Georgia | <input checked="" type="checkbox"/> TJ Tajikistan |
| <input checked="" type="checkbox"/> GH Ghana | <input checked="" type="checkbox"/> TM Turkmenistan |
| <input checked="" type="checkbox"/> GM Gambia | <input checked="" type="checkbox"/> TR Turkey |
| <input checked="" type="checkbox"/> HR Croatia | <input checked="" type="checkbox"/> TT Trinidad and Tobago |
| <input checked="" type="checkbox"/> HU Hungary | <input checked="" type="checkbox"/> UA Ukraine |
| <input checked="" type="checkbox"/> ID Indonesia | <input checked="" type="checkbox"/> UG Uganda |
| <input checked="" type="checkbox"/> IL Israel | <input checked="" type="checkbox"/> US United States of America |
| <input checked="" type="checkbox"/> IN India | <input checked="" type="checkbox"/> UZ Uzbekistan |
| <input checked="" type="checkbox"/> IS Iceland | <input checked="" type="checkbox"/> VN Viet Nam |
| <input checked="" type="checkbox"/> JP Japan | <input checked="" type="checkbox"/> YU Yugoslavia |
| <input checked="" type="checkbox"/> KE Kenya | <input checked="" type="checkbox"/> ZW Zimbabwe |
| <input checked="" type="checkbox"/> KG Kyrgyzstan | |
| <input checked="" type="checkbox"/> KP Democratic People's Republic of Korea | |
| <input checked="" type="checkbox"/> KR Republic of Korea | |
| <input checked="" type="checkbox"/> KZ Kazakhstan | |
| <input checked="" type="checkbox"/> LC Saint Lucia | |
| <input checked="" type="checkbox"/> LK Sri Lanka | |
| <input checked="" type="checkbox"/> LR Liberia | |

Check-boxes reserved for designating States (for the purposes of a national patent) which have become party to the PCT after issuance of this sheet:

☐
☐
☐

Precautionary Designation Statement: In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. (Confirmation of a designation consists of the filing of a notice specifying that designation and the payment of the designation and confirmation fees. Confirmation must reach the receiving Office within the 15-month time limit.)

Box No. VI PRIORITY CLAIM ☐ Further priority claims are indicated in the Supplemental Box

	Filing Date of earlier application (day/month/year)	Number of earlier application	Where earlier application is:		
			national application: country	regional application:* regional Office	international application receiving Office
item (1)	28 January 1998 (28.01.1998)	980185	FI		
item (2)					
item (3)					



The receiving Office is hereby requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) (only if the earlier application was filed with the Office which for the purposes of the present international application is the receiving Office) identified above as item(s) : (1)

* Where the earlier application is an ARIPO application, it is mandatory to indicate in the Supplemental Box at least one country party to the Paris Convention for the Protection of Industrial Property for which that earlier application was filed (Rule 4.10(b)(ii)). See Supplemental Box.

Box No. VII INTERNATIONAL SEARCHING AUTHORITY

Choice of International Searching Authority (ISA) (If two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used):
ISA /SE

Request to use results of earlier search; reference to that search (if an earlier search has been carried out by or requested from the International Searching Authority):

Date (day/month/year): Number Country (or regional Office)

Box No. VIII CHECK LIST

This international application contains the following number of sheets:

request : 3
description (excluding sequence listing part) : 10
claims : 2
abstract : 1
drawings : 3
sequence listing part of description : 0

Total number of sheets : 19

This international application is accompanied by the item(s) marked below

1. ☒ fee calculation sheet
2. ☐ separate signed power of attorney
3. ☒ copy of general power of attorney
4. ☐ statement explaining lack of signature
5. ☐ priority document(s) identified in Box No. VI as item(s):
6. ☐ translation of international application into (language)
7. ☐ separate indications concerning deposited microorganism or other biological material
8. ☐ nucleotide and/or amino acid sequence listing in computer readable form
9. ☒ other (specify): official action


Figure of the drawings which should accompany the abstract: 1

Language of filing of the international application: English

Box No. IX SIGNATURE OF APPLICANT OR AGENT

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the demand).

KOLSTER OY AB



Tapio Valkeiskangas

For receiving Office use only

1. Date of actual receipt of the purported international application:	28 JAN 1999	2. Drawings:
3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:		<input type="checkbox"/> received
4. Date of timely receipt of the required corrections under PCT Article 11(2):		<input type="checkbox"/> not received:
5. International Searching Authority specified by the applicant: ISA/ SE	6. <input type="checkbox"/> Transmittal of search copy delayed until search fee is paid	

For International Bureau use only


Date of receipt of the record copy by the International Bureau:



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38, 7/22		A1	(11) International Publication Number: WO 99/39534
			(43) International Publication Date: 5 August 1999 (05.08.99)
(21) International Application Number: PCT/FI99/00057		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 28 January 1999 (28.01.99)			
(30) Priority Data: 980185 28 January 1998 (28.01.98) FI			
(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).			
(72) Inventor; and			
(75) Inventor/Applicant (for US only): VIRTANEN, Kari [FI/FI]; Tohtorinkatu 34 D 17, FIN-33720 Tampere (FI).			
(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		<p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: RADIO NETWORK ACCESS MECHANISM

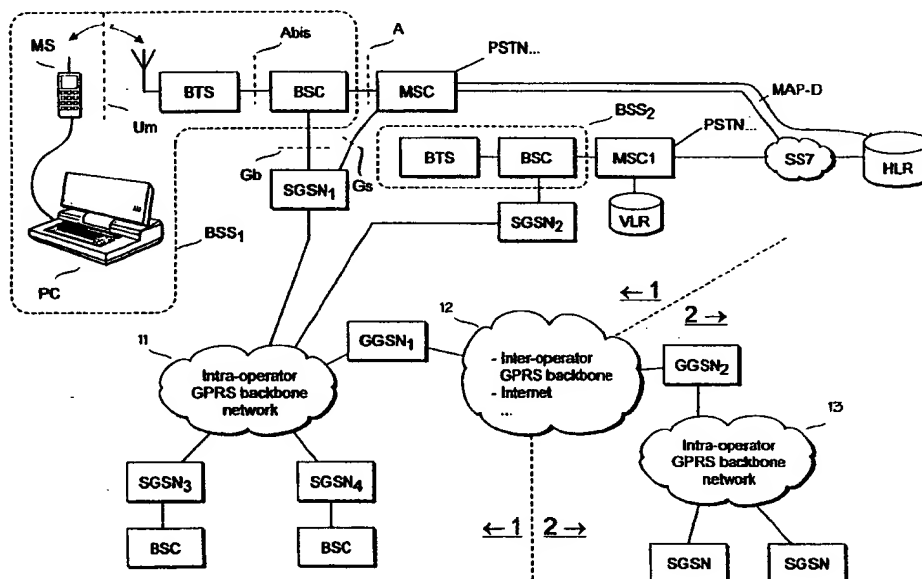

(57) Abstract

A method of registration in a telecommunications system by a mobile station, which system comprises a home location register (HLR) for maintaining subscriber data and supports a first network, such as GSM, and a second network, such as GPRS. The home location register (HLR) maintains the mobile subscriber data and a message (2-6a, 4-3) is sent to the home location register (HLR) for requesting the mobile subscriber data. According to the invention, the home location register (HLR) maintains an access parameter (PARAM) which indicates whether the mobile subscriber is entitled to use the first network, the second network or both networks. In response to said message for requesting the subscriber data, the home location register sends the mobile subscriber data and also said access parameter. The network element that requested the mobile subscriber data uses said access parameter for restricting the access of the mobile subscriber only to a circuit-switched network and/or to a packet-switched network.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

RADIO NETWORK ACCESS MECHANISM

BACKGROUND OF THE INVENTION

The invention relates to reduction of signalling load when a multi-mode (e.g. GSM/GPRS) mobile station registers in a packet radio network, such as GPRS. The invention is described in connection with a dual-mode telecommunications system which supports two different networks. To clarify the description, it is assumed that the first network is a circuit-switched network (such as GSM) and the second network is a packet-switched network (such as GPRS). Instead of the GSM network, or in addition to it, derivatives of the GSM, such as DCS, may also be used.

A General Packet Radio Service (GPRS) is a new service in the GSM. It is one of the items that is being standardized in GSM phase 2+ in the ETSI (European Telecommunication Standard Institute). The GPRS operational environment consists of one or more sub-network service areas that are interconnected using a GPRS backbone network. A sub-network comprises a number of packet data service nodes, which are here called GPRS support nodes (or agents) and each one of which is connected to the GSM mobile network so that it can provide packet data service for mobile data terminals via several base stations, i.e. cells. An intermediate mobile network provides circuit-switched or packet-switched data transmission between a support node and the mobile data terminals. Different sub-networks, in turn, are connected to an external data network, for example to a Public Switched Packet Data Network PSPDN. The GPRS service can thus be used for effecting packet data transmission between mobile data terminals and external data networks, when the GSM network functions as an access network. One feature of the GPRS service network is that it operates almost independently of the GSM network. One of the requirements set for the GPRS service is that it must operate together with different types of external PSPDN networks, such as the Internet and X.25 networks. In other words, the GPRS service and the GSM network should be able to serve all users, irrespective of the type of data networks that they wish to be connected to via the GSM network. This means that the GSM network and GPRS service must support and process different network addressing methods and data packet formats. The data packet processing also comprises routing of the packets in a packet radio network. In

addition, the users should be able to roam from their home GPRS network to a visited GPRS network.

Figure 1 illustrates a typical arrangement in a GPRS network. It should be understood that the architecture of the GPRS networks is not as mature as that of the GSM networks. All GPRS terms should therefore be understood as being descriptive terms rather than limiting ones. A typical mobile station forming a mobile data terminal consists of a mobile station MS of a mobile network and of a portable computer PC connected to the data interface of the MS. The mobile station may be, for example, a Nokia 2110, manufactured by Nokia Mobile Phones Ltd., Finland. By means of a PCMCIA type Nokia Cellular Datacard, manufactured by Nokia Mobile Phones Ltd., the mobile station can be connected to any portable personal computer PC whatsoever that has a PCMCIA card slot. The PCMCIA card thus provides the PC with an access point that supports the protocol of the telecommunications application used in the PC, such as the CCITT X.25 or Internet Protocol IP. Alternatively, the mobile station can directly provide an access point that supports the protocol used by the PC application. Further, a mobile station 3 and a PC 4 can be integrated to form a single unit, within which the application is provided with an access point that supports the protocol used by it. An example for such a mobile station with an integrated computer is a Nokia Communicator 9000, manufactured by Nokia Mobile Phones Ltd., Finland.

Network elements BSC and MSC are previously known from a typical GSM network. The arrangement of Figure 1 comprises a separate Serving GPRS Support Node SGSN. The support node controls certain operations of the packet radio service on the network side. The operations include the logging on and off the system by the mobile stations MS, updating of the routing areas of the mobile stations MS, and routing of the data packets to correct destinations. In the present application, the term 'data' should be understood in the wide sense to mean any information whatsoever transmitted in a digital telecommunications system. The information can comprise speech encoded into digital form, data communication between computers, telefax data, short segments of program code, etc. The SGSN node can be located at a base station BTS, at a base station controller BSC or at a mobile switching centre MSC, or it can be separate from all these elements. The interface between the SGSN node and the base station controller BSC is called a GB

interface. An area managed by one base station controller BSC is called a Base Station Subsystem BSS.

The intermediate mobile network provides packet-switched data transmission between a support node and mobile data terminal equipment.

5 Different sub-networks, in turn, are connected to an external data network, for example to a PSPDN, via specific Gateway GPRS Support Nodes GGSN. Packet data transmission between mobile data terminals and external data networks is thus effected by means of the GPRS service, while the GSM network functions as an access network. Alternatively, the gateway node
10 GGSN can be replaced with a router. In the following, the term 'gateway node GGSN' is also to be understood as referring to a structure in which the gateway has been replaced with a router.

In Figure 1 the GPRS network connected to the GSM network comprises a number of serving GPRS support nodes and one gateway GPRS
15 support node GGSN. The different support nodes SGSN and GGSN are interconnected via an intra-operator backbone network. It is to be understood that a GPRS network may comprise any number of support nodes SGSN and gateway nodes GGSN.

Each support node SGSN manages a packet data service in the
20 area of one or more nodes in a cellular packet radio network. To achieve this, each support node SGSN is connected to a certain local part of the GSM system, typically to a mobile services switching centre, but in some situations it may be preferable to connect it directly to a base station subsystem BSS, i.e. to a base station controller BSC or a base station BTS. A mobile station MS in
25 a cell communicates with a base station BTS over a radio interface and further through a mobile network with the support node SGSN to the service area of which the cell belongs. In principle, the mobile network between the support node SGSN and the mobile station MS only transmits packets between these two. For this purpose, the mobile network can offer either a circuit-switched
30 connection or packet-switched data packet transmission between a mobile station MS and a serving support node SGSN. An example for a circuit-switched connection between a mobile station MS and an agent is presented in WO 95/08900. An example for packet-switched data transmission between a mobile station MS and an agent is presented WO 95/20283. It should be
35 noted, however, that a mobile network provides only a physical connection

between a mobile station MS and a support node SGSN, and that its exact operation and structure are not relevant to the present invention.

5 An intra-operator backbone network 11 interconnecting the operator's SGSN and GGSN can be implemented, for example, using a local area network. It should be noted that it is also possible to implement the operator's GPRS network without an intra-operator backbone network, for example, by implementing all the features in a single computer, but this does not cause any changes in the call set-up principles according to the present invention.

10 A gateway GPRS node GGSN connects the operator's GPRS network to the other operators' GPRS networks and to data networks, such as an inter-operator backbone network 12 or an IP network. An Interworking Function IWF can be arranged between the gateway node GGSN and the other networks, but usually the GGSN is simultaneously the IWF. The inter-
15 operator backbone network 12 is one through which the gateway nodes GGSN of different operators can communicate with one another. The communication is needed to support the GPRS roaming between the different GPRS networks.

The gateway node GGSN is also used for storing the location
20 information of the GPRS mobile stations. The GGSN also routes mobile-terminated (MT) data packets. The GGSN also contains a database that associates the mobile station's network address, for example in an IP network or an X.25 network (or simultaneously in more than one network), and the mobile station identifier in a GPRS network. When the mobile station roams
25 from one cell to another within the area of one support node SGSN, location updating is needed only in the support node SGSN, and the gateway node GGSN need not be informed of the change of location. When the mobile station roams from a cell of one support node SGSN to a cell of another SGSN within the area of the same or a different operator, location updating is also
30 performed in the (home) gateway node GGSN so as to store the identifier of the new, visited support node and the identifier of the mobile station.

A home location register HLR is also used to authenticate subscribers at the beginning of a GPRS session. It contains a definition
35 between a subscriber's PDP (Packet Data Protocol) address (addresses) and the subscriber's IMSI (International Mobile Subscriber Identity). In a GSM network a subscriber is identified on the basis of the IMSI. In Figure 1 the HLR

is connected through an SS7 (Signalling System 7), for example to a mobile switching centre MSC and an intra-operator backbone network. Between the SS7 signalling system and the intra-operator backbone network there can be a direct connection or an SS7 gateway. In principle, the HLR can exchange
5 packet-switched messages with any GPRS node whatsoever. The HLR's method of communication and its connection to the GPRS network are not, however, essential to the invention.

In the above arrangement, packet-switched data (in short: packet data) can be transmitted to a mobile station over an air interface, when the
10 mobile station, controlled by the network, has first been directed to a correct kind of channel, i.e. to a packet data transmission channel. A mobile station that supports packet data transmission can either be suited only to the transmission and reception of packet data ('GPRS only') or also to the transmission of conventional circuit-switched speech and other services
15 ('multi-function terminal').

A 'GPRS only' mobile station can be in one of three different modes in the sense of the present application: a ready, a standby or an idle mode. A mobile station in the ready mode is connected to a data transmission channel and is ready to transmit and/or receive data packets. A mobile station in the
20 standby mode listens to a packet data paging channel, and after receiving its paging identifier the mobile station switches to the ready mode. A mobile station in the idle mode does not support transmission nor reception of packet data.

A multi-function terminal operates in the ready and standby modes
25 in the same way as the 'GPRS only' terminal, but in the idle mode it supports conventional circuit-switched services.

When packet data is sent to a mobile station, the data will be routed to the correct GSM network by routing it via the gateway node GGSN to the support node SGSN in which the location of the mobile station is known. If the
30 mobile station is in the standby mode, its location is known with the accuracy of a Routing Area RA. Correspondingly, if the mobile station is in the ready mode, its location is known with the accuracy of a cell.

Figure 2 illustrates registration of a mobile station in the system. Figure 2 is taken from the ETSI specification GSM 03.60 (version 5.2.0). The
35 previous support node SGSN and centre MSC/VLR of the mobile station are called "the old ones" and their present counterparts are called "the new ones".

In step 2-1 the mobile station sends an ATTACH REQUEST message. Steps 2-2 to 2-5 are neither necessary nor essential to the invention, and thus they will not be described here. In step 2-6a the new SGSN sends an UPDATE LOCATION message to the home location register HLR, which in step 2-6b
5 cancels the location (CANCEL LOCATION) from the old SGSN. In step 2-6c the old SGSN acknowledges (=ACK). In step 2-6d the new SGSN receives subscriber data from the home location register in a message INSERT SUBSCRIBER DATA and sends an acknowledgement in step 2-6e. In step 2-6f the new SGSN receives an acknowledgement to the update location
10 message which was sent in step 2-6a.

In step 2-7a the new SGSN sends a LOCATION UPDATING REQUEST to the new centre MSC/VLR. Steps 2-7b to 2-7g correspond to steps 2-6a to 2-6f. In step 2-7h the new SGSN receives an acknowledgement to the location updating request sent in step 2-7a from the new centre. In step
15 2-8 the new SGSN informs the mobile station of the fact that the attach request sent in step 2-1 has been accepted. The following steps are not essential to the invention, and thus they will not be explained more closely.

A problem related to the arrangement described above is that the GPRS side of the system has no subscriber-specific information on whether a
20 certain subscriber has access to the service on the GSM side (MSC/VLR). When a mobile station PC/MS registers in the system, a combined GPRS/non-GPRS IMSI attach operation and possibly a location area/routing area (LA/RA) update to the visitor location register MSC/VLR are carried out. This causes unnecessary signalling to the MSC/VLR via the Gs interface and
25 further to the home location register HLR via the MAP-D interface if the subscriber is only a GPRS subscriber.

A parallel problem arises when the GSM side of the system has no subscriber-specific information on whether a certain subscriber has access to the service on the GPRS side (SGSN). This causes unnecessary signalling if
30 the VLR has lost the subscriber data. In the case of a mobile-terminating call, a page has to be always sent to each SGSN node since the MSC/VLR does not know whether the subscriber has a GPRS service or not.

BRIEF DESCRIPTION OF THE INVENTION

It is an object of the invention to provide a method and an
35 apparatus implementing the method, eliminating the above-mentioned

problems related to unnecessary signalling. The objects of the invention are achieved by a method and an apparatus which are characterized by what is disclosed in the independent claims. Preferred embodiments of the invention are disclosed in the dependent claims.

5 First of all, the invention is based on finding the problem. Since the excessive signalling caused by conventional solutions does not necessarily cause actual error situations and GSM/GPRS networks are not in use yet, it is not that easy to detect the problem. In addition to finding the problem, the invention is based on finding a solution which causes as few compatibility
10 problems and changes to the function of other network elements as possible. It is not desirable to make great changes to the definitions of network elements because of a relatively small problem.

The invention comprises maintaining a subscriber-specific access parameter, which indicates what rights the subscriber in question has in both
15 networks. The access parameter is transmitted to a relevant network element on registration in the system. The advantages of the invention, such as decrease of the signalling load, are the greatest if the first network and the second network have clearly different architectures. This is the case for example when the first network is a circuit-switched network (such as GSM, DSC, etc.) and the second network is a packet-switched network (such as
20 GPRS).

An advantage of the method and arrangement of the invention is that they solve a non-obvious problem in a simple manner. In other words, the invention eliminates unnecessary signalling load when a mobile station
25 registers in the system. The invention also surprisingly provides a solution to several other separate problems, as will be described below.

According to a first embodiment of the invention, the subscriber-specific access parameter is maintained in the home location register. An advantage of this embodiment is that no changes are needed in the mobile
30 stations and their SIM cards.

According to a second embodiment of the invention, the subscriber-specific access parameter is maintained in the mobile station, in particular in its SIM card (Subscriber Identity Module). An advantage of this embodiment is that the signalling load decreases considerably. On the other hand, changes
35 have to be made to the mobile stations, at least to their SIM cards.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in greater detail by means of preferred embodiments with reference to the accompanying drawings, in which

Figure 1 illustrates an architecture of a GSM/GPRS system;

5 Figure 2 illustrates registration of a mobile station in the system according to the prior art;

Figure 3 illustrates registration of a mobile station in the system according to a first embodiment of the invention;

10 Figure 4 illustrates how the invention solves a separate problem which arises when the data of the visitor location register disappear.

DETAILED DESCRIPTION OF THE INVENTION

Figure 3 illustrates registration of a mobile station in the system according to the solution of the invention. In Figure 3 the same numbers have the same significance as in Figure 2, except when there are some changes in the messages, in which case the first number of a message is 3. An access parameter PARAM of the invention indicates whether the subscriber has access to the GSM network, the GPRS network or to both networks. According to a first embodiment, the access parameter is maintained in the subscriber data of the home location register HLR. In the figure message 3-6d corresponds to message 2-6d described in connection with figure 2, except that an access parameter PARAM according to the invention is associated with message 3-6d. In this case it is assumed that the subscriber has access only to the GPRS network. Since the new SGSN knows that the subscriber has no access to the GSM network, steps 2-7a to 2-7h are not needed at all when the solution of the invention is used. Instead of message 2-8, message 3-8 ATTACH RESPONSE is used, which conveys information to the mobile subscriber on the fact that he has only GPRS rights. Message 2-10 is not needed. It is not necessary to transmit data on a subscriber who has no GSM rights to the visitor location register of the new centre.

30 According to a second embodiment of the invention, the subscriber-specific access parameter is maintained in the mobile station, particularly in its SIM card. In that case, a mobile station whose SIM card has information only on the GPRS rights decides independently not to even try to register in the GSM network. Decrease of the signalling load is complete since there would be no signals in a signalling chart corresponding to Figure 3.

35

Figure 4 illustrates how the invention solves another separate problem. Figure 4 illustrates set-up of a mobile terminating call when the data of the visitor location register VLR have disappeared, for example during equipment maintenance or program updating. In step 4-1 the HLR requests a roaming number from the VLR. In step 4-2 the VLR requests authentication data from the HLR. In step 4-3 the VLR requests the HLR to send back the lost data. In optional step 4-4 the subscriber is set under trace. In step 4-5 the HLR sends the subscriber data to the VLR in the message INSERT SUBSCRIBER DATA. (The access parameter PARAM illustrated in step 4-5 does not exist in the functionality according to the prior art.) In step 4-7 the mobile station MS receives a mobile-terminating call or a short message via the centre MSC. However, the visitor location register does not have subscriber location data, and thus in step 4-8 it requests the centre to search for the mobile station (SEARCH FOR MS). According to the prior art, a page has to be sent to the mobile station in step 4-9 via each of the base station systems BSS₁ to BSS_n under the centre MSC and also via each of the support nodes SGSN₁ to SGSN_n.

According to the invention, the above-described subscriber-specific access parameter PARAM, which indicates whether the subscriber has access to the GSM network, the GPRS network or to both networks, is associated with message 4-5. In step 4-9 paging of a mobile station can be substantially reduced if paging is limited to the network (GSM and/or GPRS) to which the subscriber in question has access. If the subscriber has no access to the GPRS network, paging via the SGSN nodes is unnecessary.

The invention also solves other problems. According to the prior art, an operator cannot explicitly restrict the access of a subscriber to only one network if the subscriber has a short message service SMS in use because the same subscriber data are valid both on the GSM and the GPRS sides of the network. Since the subscriber can register both in the GSM and the GPRS networks, he may reserve resources from both networks (e.g. from temporary registers), even though the services of only one network were available to the subscriber in addition to the short message service (e.g. only GSM + SMS or GPRS + SMS).

Since according to the invention the parameter indicating to which network the subscriber has access (GSM, GPRS or both) can be set explicitly for the subscriber, the operator may optimize the use of the system. This

particularly concerns subscribers to the short message service. According to the prior art, the SMS subscription in the home location register enables access both to the GSM and the GPRS networks. According to the invention, the operator may optimize the use of the system by setting the subscribers who have access only to the GPRS network and short message service to the state "only GPRS network allowed".

The invention also reduces the use of network resources by preventing a subscriber from registering in a wrong network (GSM or GPRS). If the subscriber is for example a GPRS subscriber without the short message service, he may try to register in the GSM network, which loads the network unnecessarily.

It is obvious to a person skilled in the art that as the technology advances, the inventive concept can be implemented in several different ways. Thus the invention and its embodiments are not limited to the examples describe above, but may vary within the scope of the claims.

CLAIMS

1. A method of registration in a telecommunications system by a mobile station, which system comprises a home location register (HLR) for maintaining subscriber data and supports a first network, such as GSM, and a
5 second network, such as GPRS;

the method comprising the steps of: maintaining the mobile subscriber data in the home location register (HLR), and sending, from another network element, a message (2-6a, 4-3) to the home location register (HLR) for requesting the mobile subscriber data;

10 **characterized** in that

the home location register (HLR) maintains an access parameter (PARAM) which indicates whether the mobile subscriber is entitled to use the first network, the second network or both networks;

15 in response to said message for requesting the subscriber data, the home location register sends the mobile subscriber data and also said access parameter;

the network element that requested the mobile subscriber data uses said access parameter for restricting the access of the mobile subscriber only to the first network or to the second network.

20 2. A method of registration in a telecommunications system by a mobile station, which system comprises a home location register (HLR) for maintaining subscriber data and supports a first network, such as GSM, and a second network, such as GPRS;

25 the method comprising storing mobile subscriber data in the memory of a mobile station, preferably in its SIM card;

characterized in that

an access parameter (PARAM) indicating whether the mobile subscriber is entitled to use the first network, the second network or both networks is also stored in the memory of the mobile station;

30 the mobile station uses said access parameter to restrict the access of the mobile subscriber only to the first and/or the second network.

3. A method according to claim 1 or 2, **characterized** in that the mobile subscriber's access can be restricted only to one network even though a short message service had been defined for the mobile subscriber.

4. A method according to claim 1 or 3, **characterized** in that the network element that requested the mobile subscriber data uses said access parameter to prevent location updating (2-7) in a network which the mobile subscriber is not entitled to use.

5 5. A method according to claim 2 or 3, **characterized** in that the mobile station independently decides not to send an attach request (2-1) in a network which the mobile subscriber is not entitled to use.

6. A method according to claim 1, 3 or 4, **characterized** in that the telecommunications system comprises a visitor location register (VLR)
10 known per se; and

when a mobile station which is in the area of the visitor location register receives a call or a short message and the visitor location does not have data of the mobile subscriber in question, said access parameter (PARAM) is used for restricting paging (4-9) of the mobile station only to a
15 network which the mobile subscriber is entitled to use.

7. A method according to any one of the preceding claims, **characterized** in that the first network is a circuit-switched network, such as GSM/DCS, and the second network is a packet-switched network, such as GPRS.

20 8. A data structure which comprises mobile subscriber data in a telecommunications system which supports a first and a second network;

characterized in that the data structure also comprises an access parameter (PARAM) which indicates whether the mobile subscriber is entitled to use the first network, the second network or both networks.


25 9. A data structure according to claim 8, **characterized** in that it is located in the home location register (HLR) of the telecommunications system.

10. A data structure according to claim 8, **characterized** in that it is located in the memory of the mobile station, preferably in its SIM card.

30 11. A data structure according to any one of claims 8 to 10, **characterized** in that the first network is a circuit-switched network, such as GSM/DCS, and the second network is a packet-switched network, such as GPRS.

Fig. 1

1/3

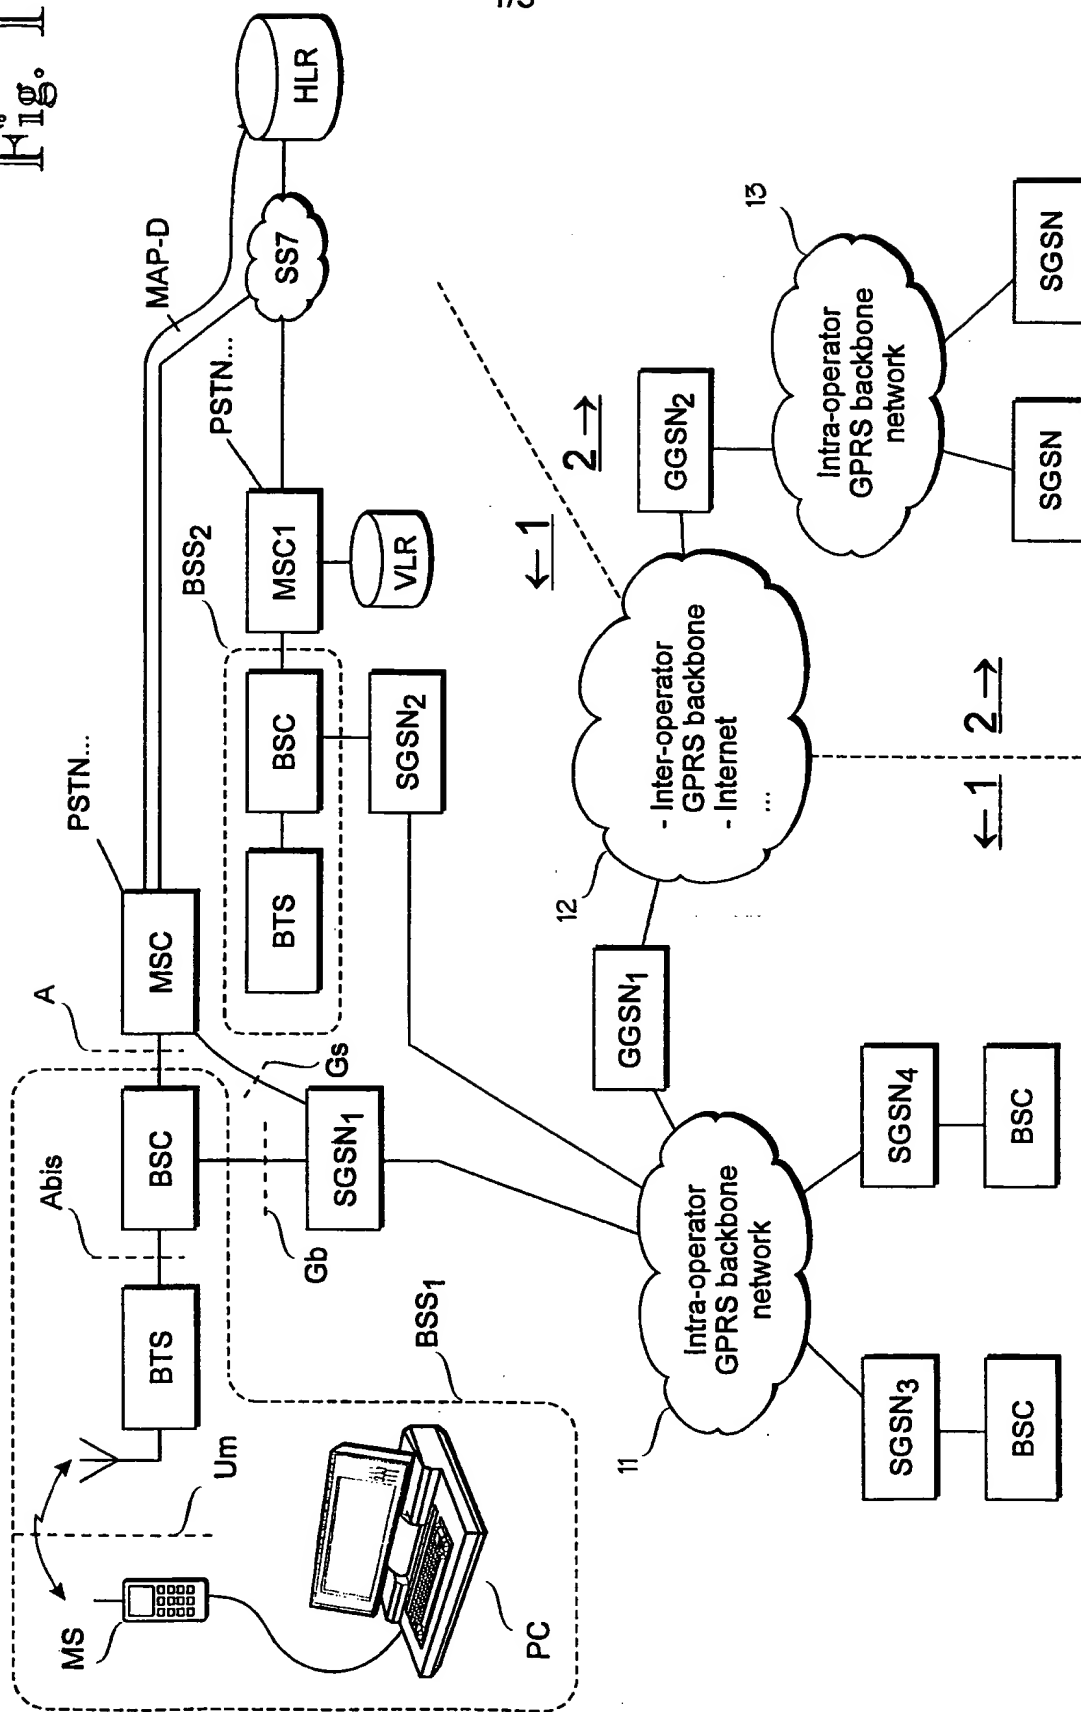

2/3

Fig. 2

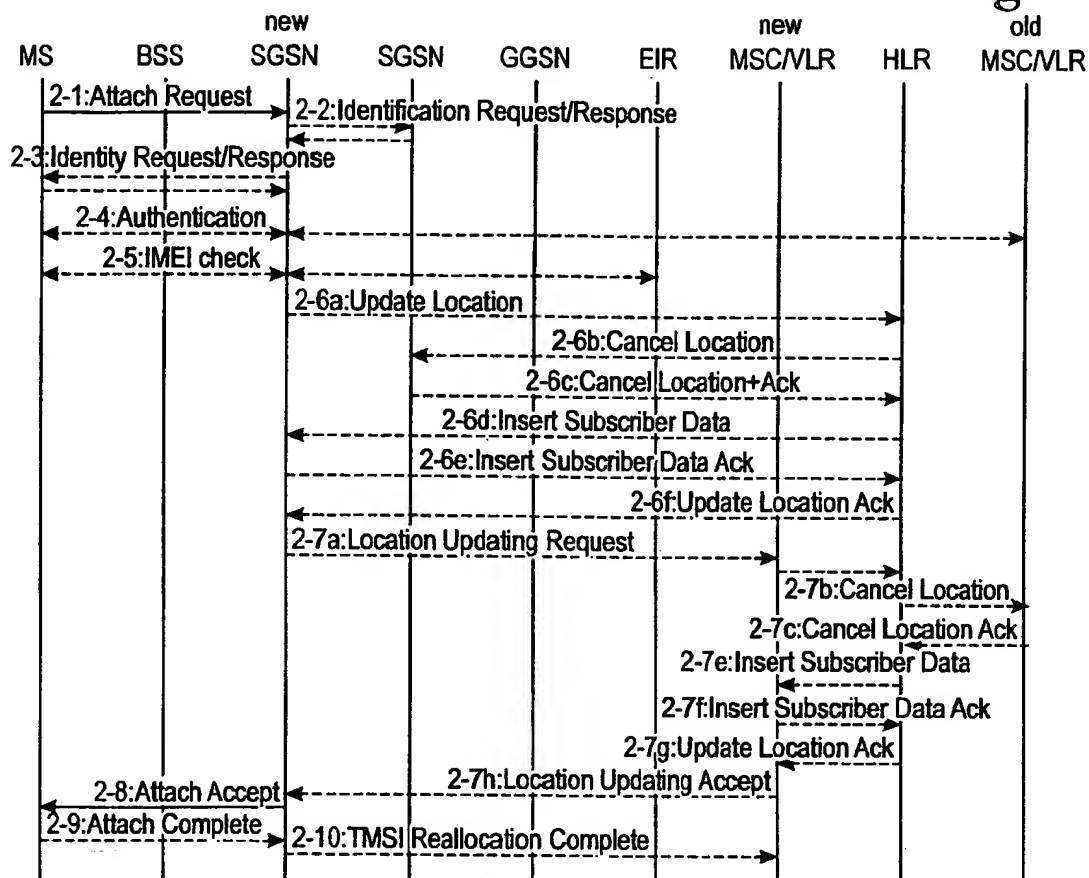


Fig. 3


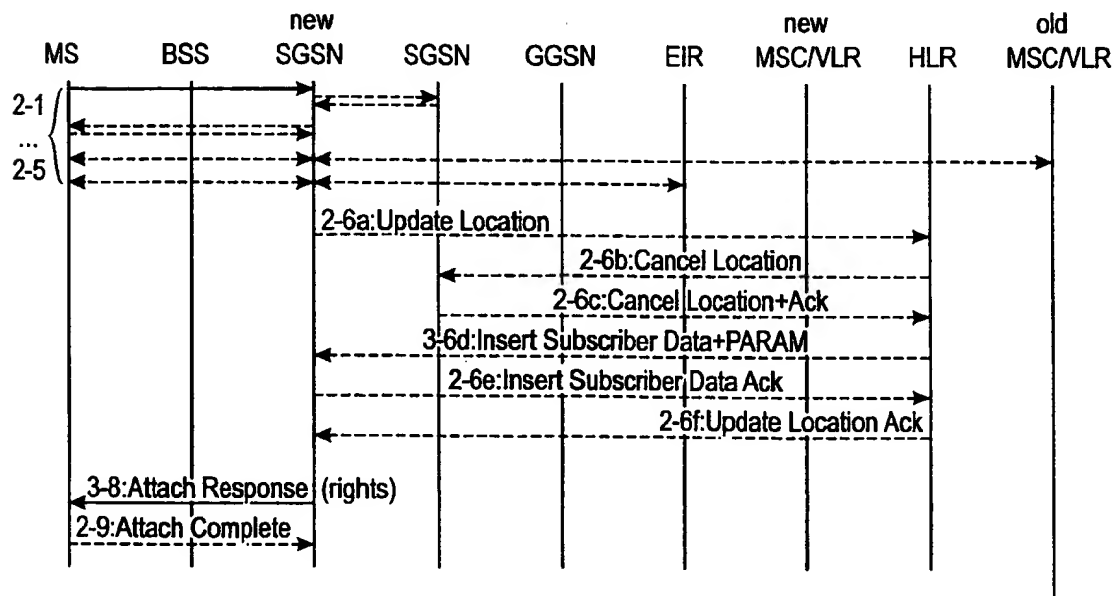


Fig. 4

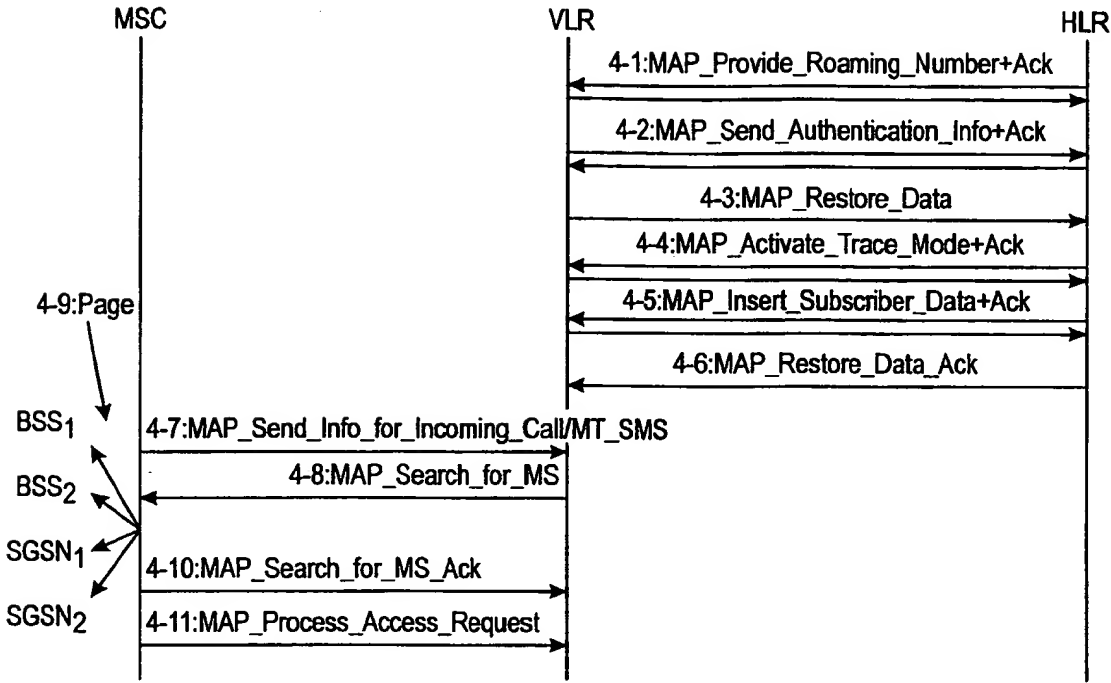

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00057

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: H04Q 7/38, H04Q 7/22 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: H04Q		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9740638 A1 (TELIA AB), 30 October 1997 (30.10.97), page 1, line 12 - line 30, abstract --	
A	WO 9726764 A1 (NOKIA TELECOMMUNICATIONS OY), 24 July 1997 (24.07.97), abstract, see the claims --	
P,A	GB 2322521 A (VODAFONE LIMITED), 26 August 1998 (26.08.98), abstract, see the claims -- -----	
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
29 June 1999		03 -07- 1999
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Peter Hedman/MN Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/FI 99/00057

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9740638 A1	30/10/97	AU 1046297 A	19/06/97
		EP 0883868 A	16/12/98
		EP 0894410 A	03/02/99
		NO 984869 A	22/10/98
		SE 9601559 A	25/10/97
WO 9726764 A1	24/07/97	AU 1445997 A	11/08/97
		FI 2705 U	20/01/97
		FI 102234 B	00/00/00
		FI 960211 A,V	17/07/97
GB 2322521 A	26/08/98	GB 9703795 D	00/00/00